

歐規 EU Standard


Precision punch DIN 9861 Type D

DIN 9861 D型標準沖頭



材質 Material: HSS

硬度 Hardness: HRC62°~64° Head: HRC45°~55°

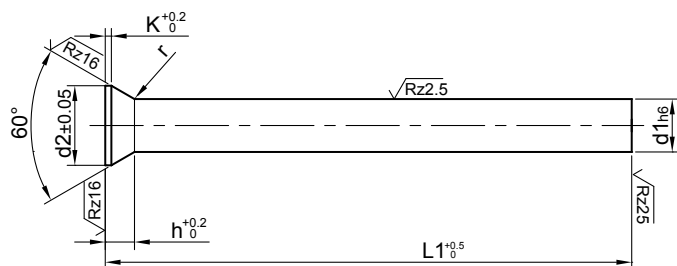

d1	d2	h	K	r	L				d1	d2	h	K	r	L					
					71	80	100	120						71	80	100	120		
0.50	0.9	0.55	0.2	0.2 ^{+0.2} ₀					2.40	3.50	1.45	0.4 ^{+0.3} ₀	0.4 ^{+0.3} ₀						
0.55	1.0	0.59							2.50		1.37								
0.60	1.1	0.63							2.60	1.71									
0.65	1.2	0.68							2.70	1.63									
0.70	1.3	0.72							2.80	1.54									
0.75		0.68							2.90	1.45									
0.80	1.4	0.92	0.4						3.00	4.50	1.80			0.5	0.6 ^{+0.4} ₀				
0.85		0.88							3.10		1.71								
0.90	1.6	1.01							3.20		1.63								
0.95		0.96							3.30		1.54								
1.00	1.8	1.19	0.5	0.4 ^{+0.3} ₀					3.40		1.45								
1.10		1.11							3.50	1.80									
1.20	2.0	1.19							3.60	1.71									
1.30		1.11							3.70	1.63									
1.40	2.2	1.19							3.80	1.54									
1.50		1.11							3.90	1.45									
1.60	2.5	1.28							4.00	1.80									
1.70		1.19							4.10	1.71									
1.80	2.8	1.37							4.20	1.63									
1.90		1.28							4.30	1.54									
2.00	3.0	1.37							4.40	1.45									
2.10	3.2	1.45							4.50	1.80									
2.20		1.37							4.60	1.71									
2.30	3.5	1.54							4.70	1.63									