


SKD61 Ejector Sleeve- ESFA Type

ESFA射梢套筒



- **材質**：SKD61
- **硬度**：HRC35° ~ 40°
- **氮化處理表面硬度 (Surface)**：HV900以上

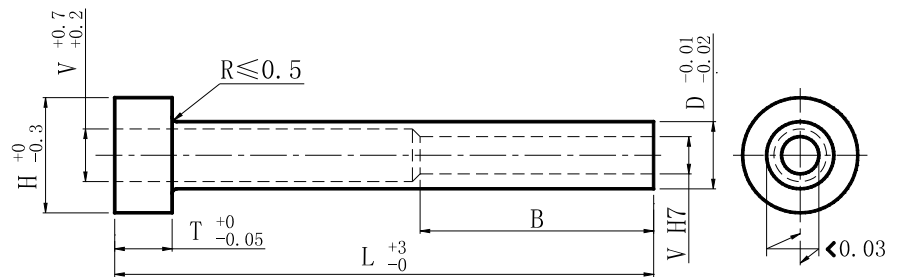

CODE: ESFA

Price:RMB

H	T	D	V	L															
				100	150	200	250	300	350	400	450	500	550	600	650	700	750	800	
8	6	4	2	35	53	70	100	120											
			2.5	40	60	80	113	135											
4.5		2.0 2.5	35	53	70	100	120	175	200										
		3	40	60	80	113	135	193	220										
5		2.0 2.5 3.0	35	53	70	100	120	175	200	248	275	330							
		3.5	40	60	80	113	135	193	220										
5.5		2.0 2.5	35	53	70	100	120	175	200	248	275	330	360						
		3.0 3.5	35	53	70	100	120	175	200	248	275	330	360						
		4	40	60	80	113	135	193	220										
6		2.0 2.5	35	53	70	100	120	175	200	248	275	330	360						
		3.0 3.5	35	53	70	100	120	175	200	248	275	330	360						
		4	35	53	70	100	120	175	200	248	275	330	360						
		4.5	40	60	80	113	135	193	220										
6.5		2.0 2.5 3.0	35	53	70	100	120	175	200	248	275	330	360						
		3.5 4.0 4.5	35	53	70	100	120	175	200	248	275	330	360						
		5	40	60	80	113	135	193	220										
		2.0 3.0 3.5	35	53	70	100	120	175	200	248	275	330	360						
		4.0 4.5 5.0	35	53	70	100	120	175	200	248	275	330	360						
7		5.5	40	60	80	113	135	193	220										
		8	3.0 3.5 4.0	35	53	70	100	120	175	200	248	275	330	360	423	455	488	520	
8	4.5 5.0 5.5	35	53	70	100	120	175	200	248	275	330	360	423	455	488	520			
	6	40	60	80	113	135	193	220											
9	9	3.5 4.0 4.5	45	68	90	125	150	210	240	293	325	413	450	520	560	600	640		
		5.0 5.6 6.0	45	68	90	125	150	210	240	293	325	413	450	520	560	600	640		
		6.5 7.0	45	68	90	125	150	210	240	293	325	413	450	520	560	600	640		
10	10	3.5 4.0 4.5	45	68	90	125	150	210	240	293	325	413	450	520	560	600	640		
		5.0 5.5 6.0	45	68	90	125	150	210	240	293	325	413	450	520	560	600	640		
		6.5 7.0	45	68	90	125	150	210	240	293	325	413	450	520	560	600	640		
11	11	3.5 4.0 4.5	45	68	90	125	150	210	240	293	325	413	450	520	560	600	640		
		5.0 5.5 6.0	45	68	90	125	150	210	240	293	325	413	450	520	560	600	640		
		6.5 7.0 7.5	45	68	90	125	150	210	240	293	325	413	450	520	560	600	640		
		8	45	68	90	125	150	210	240	293	325	413	450	520	560	600	640		
12	12	3.5 4.0 4.5	45	68	90	125	150	210	240	293	325	413	450	520	560	600	640		
		5.0 5.5 6.0	45	68	90	125	150	210	240	293	325	413	450	520	560	600	640		
		6.5 7.0 7.5	45	68	90	125	150	210	240	293	325	413	450	520	560	600	640		
		8	45	68	90	125	150	210	240	293	325	413	450	520	560	600	640		

Order : ESFA × D × V × L × B × Qty