

歐規 EU Standard


Precision drill bush DIN 172 Type A

DIN 172 A型導引襯套



材質 Material: Case hardened steel

硬度 Hardness: 740+80HV 10

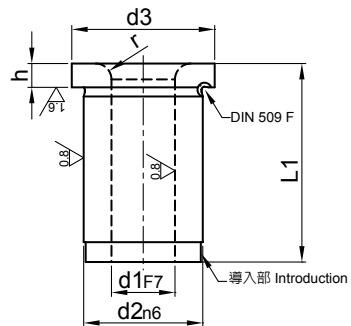

| d1        | d2 | d3 | L1 | h   | r   | Price |
|-----------|----|----|----|-----|-----|-------|
| 0.4-1.0   | 3  | 6  | 6  | 2   | 1   |       |
|           |    |    | 9  |     |     |       |
| 1.1-1.8   | 4  | 7  | 6  |     |     |       |
|           |    |    | 9  |     |     |       |
| 1.9-2.6   | 5  | 8  | 6  |     |     |       |
|           |    |    | 9  |     |     |       |
| 2.7-3.3   | 6  | 9  | 8  | 2.5 | 1   |       |
|           |    |    | 12 |     |     |       |
|           |    |    | 16 |     |     |       |
| 3.4-4.0   | 7  | 10 | 8  |     |     |       |
|           |    |    | 12 |     |     |       |
|           |    |    | 16 |     |     |       |
| 4.1-5.0   | 8  | 11 | 8  | 3   | 1.5 |       |
|           |    |    | 12 |     |     |       |
|           |    |    | 16 |     |     |       |
| 5.1-6.0   | 10 | 13 | 10 |     |     |       |
|           |    |    | 16 |     |     |       |
|           |    |    | 20 |     |     |       |
| 6.1-8.0   | 12 | 15 | 10 | 4   | 2   |       |
|           |    |    | 16 |     |     |       |
|           |    |    | 20 |     |     |       |
| 8.1-10.0  | 15 | 18 | 12 |     |     |       |
|           |    |    | 20 |     |     |       |
|           |    |    | 25 |     |     |       |
| 10.1-12.0 | 18 | 22 | 12 | 5   | 3   |       |
|           |    |    | 20 |     |     |       |
|           |    |    | 25 |     |     |       |
| 12.1-15.0 | 22 | 26 | 16 |     |     |       |
|           |    |    | 28 |     |     |       |
|           |    |    | 36 |     |     |       |
| 15.1-18.0 | 26 | 30 | 16 |     |     |       |
|           |    |    | 28 |     |     |       |
|           |    |    | 36 |     |     |       |
| 18.1-22.0 | 30 | 34 | 20 |     |     |       |
|           |    |    | 36 |     |     |       |
|           |    |    | 45 |     |     |       |
| 22.1-26.0 | 35 | 39 | 20 |     |     |       |
|           |    |    | 36 |     |     |       |
|           |    |    | 45 |     |     |       |
|           |    |    | 56 |     |     |       |
| 26.1-30.0 | 42 | 46 | 25 |     |     |       |
|           |    |    | 45 |     |     |       |
|           |    |    | 56 |     |     |       |